



Ration Delivery Box

Models RDB 1102-23 and RDB 1202-25



A Better Way to Deliver Pre-Mixed Rations

- 50,000 lb. maximum load capacity.
- 1,300 cu. ft. maximum volume capacity.
- 12 ga. stainless liners, 60" high.
- 48" wide stainless steel conveyor body.
- Side access door in conveyor body.
- Automatic digital overload sensor to interrupt retention gate movement.
- Spout with magnets.
- One piece full width floor belt.
- Truck mounted scale and hydraulic controls.
- Full length scale frame.
- Two models: 1202-25 and 1102-23




www.rotomix.com

Call for more information! 620.225.1142



Ration Delivery Box

Models RDB 1102-23 and RDB 1202-25

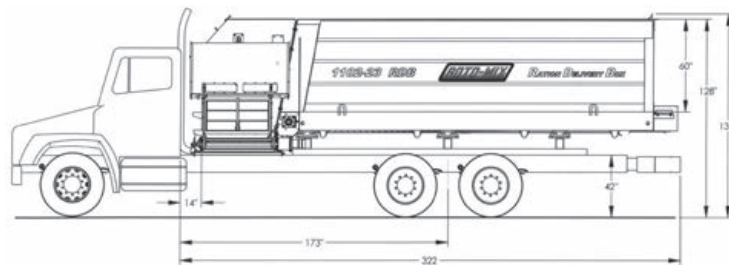

Innovative
Patented belt and
retention gate
floor provides
less compaction
to deliver a
consistent and
even flowing ration
to the bunk, from
start to finish.

Comes equipped
standard with
magnets.



Specifications	Ration Delivery Box	
	1102-23 RDB	1202-25 RDB
Max. load*	50,000 lbs.	50,000 lbs.
Loading Box length	23 ft.	25 ft.
Capacity w/ Extensions (20")	1200 cu. ft.	1300 cu. ft.
Height	128in.	128 in.
Width	121 in.	121 in.
Cab to center of tandem (CT)	182 in.	190 in.
Hydrostat pump / motor for floor belt and gate	Yes	Yes
Load sensing flow on demand pump, powers conveyor, beaters.	Yes	Yes
Pump reservoir	60 gal.	60 gal.
Rotary level control	Yes	Yes
Approx. weight empty	---	37,000 lbs.

All dimensions and specifications are approximate and subject to change without notice.

*May require extensions

Options:

- Separate cab controlled Hydrostatic Motor and Pump to independently control the live floor belt with variable speed and both forward and reverse directions.
- Additional load sensing, flow on -demand pump. Lowers Heat and Saves Fuel because it only uses energy on demand for the flow and pressure needed, saving the feeder money!
- Standard flood light on the conveyor side illuminates conveyor and feed bunk to the rear of the truck to assist the operator for night feeding applications.
- Optional lights to illuminate inside of the feed box and backup light located on the rear bumper to further assist in night feeding applications.
- Optional camera system that shows inside the conveyor housing to assist operator by displaying inside the delivery box, showing how the feed is flowing, the beaters, and how the feed is discharging through the door.
- Additional camera option displays outside discharge conveyor and feed bunk to assist the operator in feeding inside the bunk and the truck position to the bunk.

Ask for a demonstration



ROTO-MIX LLC

2205 East Wyatt Earp Blvd., P.O. Box 1724
Dodge City, Kansas 67801
Fax 620.225.6370 • info@rotomix.com



Call today to connect with a local dealer

For additional information visit us at

620.225.1142

www.rotomix.com

