

T-SERIES AG-BAGGERS



Transforming Ag-Bag by RCI

Introducing the T-Series Ag-Baggers for better storage and better forage. Based on customer and dealer feedback, we have increased the T-Series Ag-Baggers' forage capacity while improving serviceability and transportability.

The T7060 and T7170 Ag-Baggers deliver a fresh design in forage flow with a single, wider conveyor, forage distributor, revolutionary rotor, and for the T7170, a sweeping tunnel cleanout.

In addition, the T-Series Ag-Baggers feature many operational enhancements including a redesigned operator station, larger hydraulic tank, standard toolbox for convenience, standard 300-foot cables, and a new bag cradle and tunnel extension lift system. The T7170 Ag-Bagger also features an integrated hydraulic lift system.




Redesigned Backstop Lifting Points

Backstop can be lifted with multiple devices without getting close to rope webbing.



Single, Wider Conveyor

A single, 12-inch wider conveyor has more surface area to carry and handle larger forage loads with taller sides for wind protection. The single conveyor features a stainless-steel floor which is replaceable and reinforced for longer life.

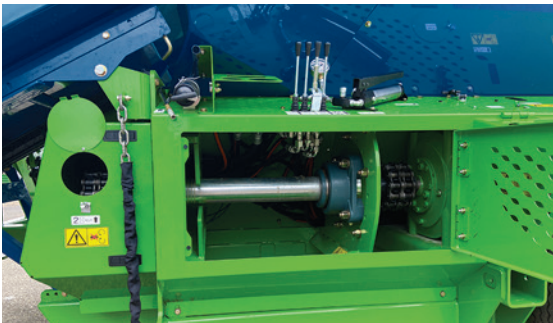

Operator Station with Serviceability

Operators can easily adjust conveyor, conveyor lift, cable rewind and regulate brake pressure with easy to access controls. Serviceability features are now located in this same area. Operators can grease all bearings with a central grease bank, oil chain drives, store grease gun and chain lubes. PTO holder for quick removal is located here too.





● **Tunnel Extension and Lift System**

Middle tunnel extension increases tunnel length by three feet for greater pack density and smoother sides before the forage moves into Genuine Ag-Bag Plastic. New lift system design moves tunnel pieces without climbing on the machine.

● **Sweeping Tunnel Cleanout**

Standard on all T7170 machines, this hydraulic-powered tunnel cleanout will save labor, forage, and plastic. Not available on the T7060.



● **Revolutionary Rotor**

Redesigned with twice as many rotor teeth from edge to edge resulting in more consistent forage flow for faster unloading and increased capacity. Forage distributor moves forage over the entire rotor for faster unloading.



● **Quick Transportability**

Hitch design changes machine direction to place the tunnel on the outside of the road while maintaining 8 feet, 6 inch travel width.

For the T7170 only, the Integrated hydraulic lift system can quickly change between transport and Ag-Bagging mode.

T-Series Specifications

FEATURE	T7060	T7170
DRIVE		
Tractor PTO RPM Rated Speed	540	
Gearbox	Heavy-Duty Corner Gearbox	
Drive Chain	Double 120 Roller Chain	
Rotor Width	6 ft.	7 ft.
Number of Rotor Teeth	108	126
Rows of Rotor Teeth	3 - Revolutionary	
Rotor Bearings (Both Sides)	Footed Spherical 3-7/16 in.	
Jackshaft Size and Bearings (Both)	Footed Spherical 3-7/16 in.	
CONVEYOR		
Single Wide Chain Conveyor with CA550 Chain	Standard	
Hydraulic Conveyor Lift	Standard	
HYDRAULICS		
Self-Contained Hydraulics	Standard	
External Reservoir	Standard	
Hydraulic Jack System	NA	Standard
CABLE AND BACKSTOP		
Cable Length (approximate)	300 ft. Standard	
Cable Brakes	Dual Disc Industrial Brake	
Brake Hand Pump	Standard	
Hydraulic Cable Rewind	Standard	
Steel Backstop with Multiple Pick Points	Standard	
Maximum Ag-Bag Length	300 ft.	
TUNNELS AND EXTENSIONS		
6 ft. Tunnel Top	Yes - Interchangeable	NA
8 ft. Tunnel Top	Yes - Interchangeable	NA
9 ft. Tunnel Top	Yes - Interchangeable	Yes - Interchangeable
10 ft. Tunnel Top	NA	Yes - Interchangeable
6 ft. x 34 in. Tunnel Extension	Standard with 6 ft. Tunnel Top	NA
8 ft. x 34 in. Tunnel Extension	Standard with 8 ft. Tunnel Top	NA
9 ft. x 34 in. Tunnel Extension	Standard with 9 ft. Tunnel Top	Standard with 9 ft. Tunnel Top
10 ft. x 34 in. Tunnel Extension	NA	Standard with 10 ft. Tunnel Top
8 ft. x 34 in. Middle Extension	Optional	NA
9 ft. x 34 in. Middle Extension	Optional	Optional
10 ft. x 34 in. Middle Extension	NA	Optional
Sweeping Tunnel Cleanout	NA	Standard
BAG BOOM AND CRADLE		
Bag Boom with Brake Style Winch	Optional for 6 ft. Tunnel - Standard for 8 / 9 / 10 ft. tunnels	
Bag Cradle with Tunnel Lift Capability	Optional for 6 ft. Tunnel - Standard for 8 / 9 / 10 ft. tunnels	
INOCULANT APPLICATION		
Dry or Liquid	Optional	
SPECIFICATIONS		
Overall Width (Transport)	8 ft. 6 in.	
Overall Width (Ag-Bagging)	20 ft.	21 ft.
Overall Length (Transport)	19 ft. 2 in.	20 ft. 2 in.
Overall Length (Ag-Bagging) (approx)	12 ft. without Ext / 14 ft. with Std Ext / 17 ft. with Mid Ext	
Overall Transport Height (for farm)	12 ft. 6 in.	
Overall Transport Height (from factory)	10 ft. 6 in.	
Overall Weight*	11,000 lbs.	12,500 lbs.
Tongue Weight*	1,600 lbs. (Transport)	
Horsepower Minimum / Maximum	100 hp / 170 hp	

* With 9 ft. Tunnel and Mid Ext, approx.



24/7 Parts and Service

Ag-Bag is your one-stop shop for quality forage with the best Ag-Bag machines, full line of parts, 24/7 product support, Genuine Ag-Bag Plastic, and forage inoculants.



Genuine Ag-Bag Plastic

Forages and feed are the most expensive input on livestock operations. Genuine Ag-Bag Plastic has a 2-year warranty and consistently incorporates the best raw materials and technologies to protect your forages every day.

**Better Storage
Better Forage**

208 River Knoll Drive
Mayville, WI 53050
1-800-334-7432
www.ag-bag.com



Like us on Facebook

Subscribe on YouTube