




**KURA**


*The Gold Standard*



**1" Thick**


3x more traction than 3/4" flooring

Several size options

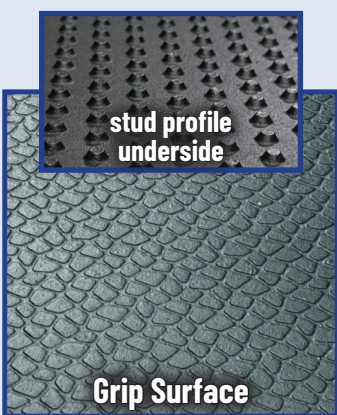

**CIRRUS**

*Budget Meets Comfort*

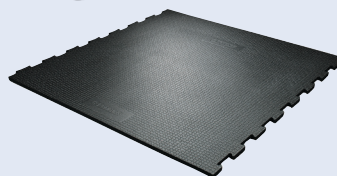

**3/4" Thick**


Ideal softness

Designed for use with scrapers



**pediKURA**


*Abrasion Zones*

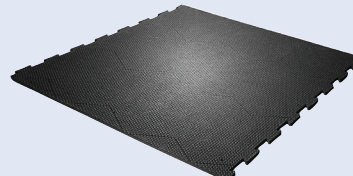

**1" Thick**

Cover 20% of rubber surfaces

Available as pediCIRRUS

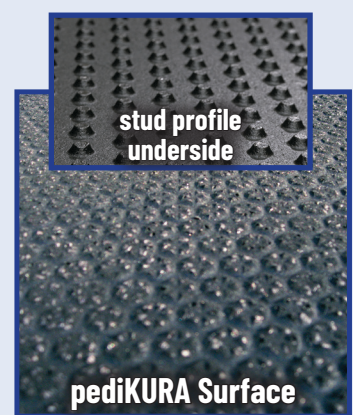

North American Distributor:



**Agromatic** INC

(800) 800-5824 • agromatic.net

More technical details on request.

The products presented here should only be used for the mentioned applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Please take notice of the corresponding KRAIBURG specifications, tolerances and installation instructions with useful advice and tips. You will obtain these at agromatic.net.




**Agromatic** INC

**Rubber Flooring & Stall Mats**

**RIMA & profiDRAIN**

*Drainage Channels*

**RIMA**

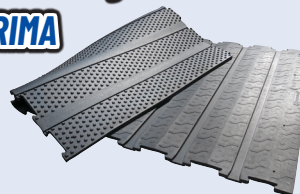


**RIMA - 1" Thick**

Curved surface with 4% slope for drainage




**profiDRAIN**

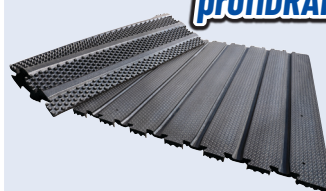


**profiDRAIN - 1-1/4" Thick**

Curved surface with 6% slope and optiGrip surface

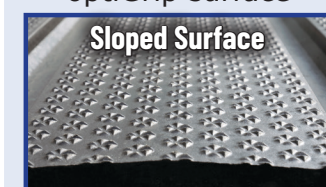

**PASEO**

*Utility Flooring*

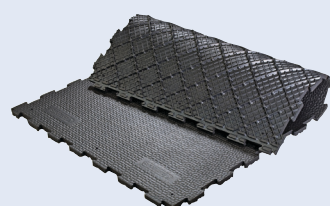


**1-1/4" Thick**

Parlor pit flooring



**MONTA**

*For Inclined Areas*

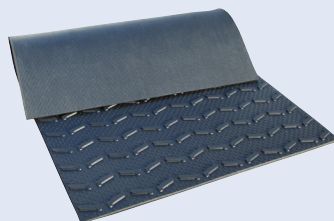


**1" Thick**

Ribbed profile improves footing on steep slopes




**LOMAX**

*Perforated Flooring*

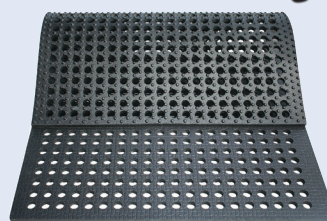


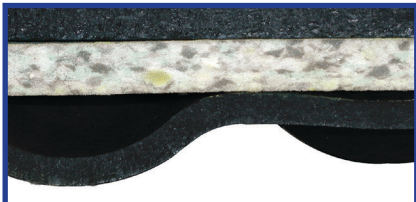
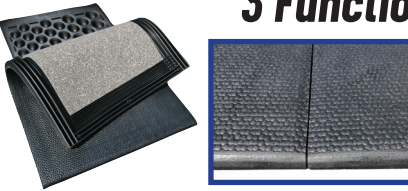
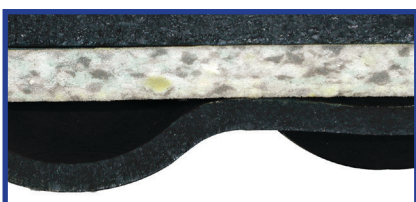

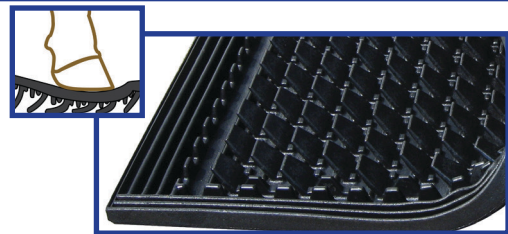




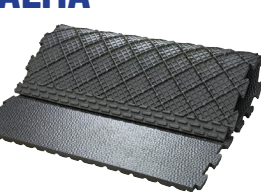

**1" Thick**

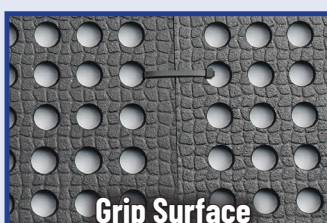Soil stabilization











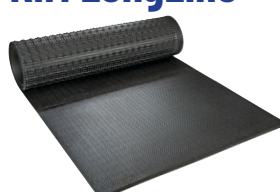

**Individual Stall Mats**

Free Stalls ✓ Tie Stalls ✓	<b>KEW Plus</b> <b>3 Functional Layers</b>  Mats joined with connector bar		Thickness: 2-1/2" Mat Width: 44" Mat Length: 72" Connector Bars: 3-1/2" 7-1/2" 5-1/2" 9-1/2"
Free Stalls ✓ Tie Stalls ✗	<b>KEW Plus Solo</b> <b>3 Functional Layers</b>  Mats laid out edge to edge		Thickness: 2-1/2" Mat Width: 45", 47" or 49" Mat Length: 72"
Free Stalls ✓ Tie Stalls ✗	<b>WINGFLEX</b> <b>Wing Profile</b> 		Thickness: 2-1/2" Mat Width: 40" or 44" Mat Length: 72" Connector Bars: 3-1/2" 7-1/2" 5-1/2" 9-1/2"
Free Stalls ✓ Tie Stalls ✓	<b>KKM</b> <b>Honeycomb Profile</b> 		Thickness: 1-1/4" Mat Width: 43-1/4" 47-1/4" 45-1/4" 49-1/4" Mat Length: 67" or 72"
Free Stalls ✓ Tie Stalls ✓	<b>KIM</b> <b>Air Cushion Profile</b> 		Thickness: 1-1/4" Mat Width: 45-1/4" or 47-1/4" Mat Length: 67"
Free Stalls ✓ Tie Stalls ✓	<b>CALMA</b> <b>Air Cushion Profile</b> 		Thickness: 1-1/4" Mat Width: 45-1/4" Mat Length: 67"

**Deep Bedded System**

<b>POLSTA</b> <b>2 Functional Layers</b> 		Thickness: 4" Mat Width: 43-1/4" Mat Length: 35-7/8"
--	--	--



**Continuous Stall Mat Rolls**

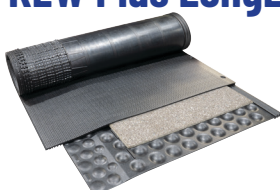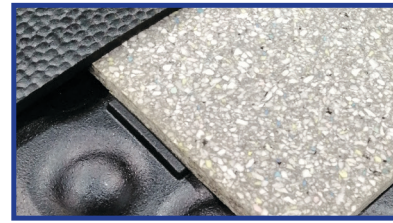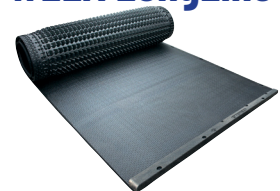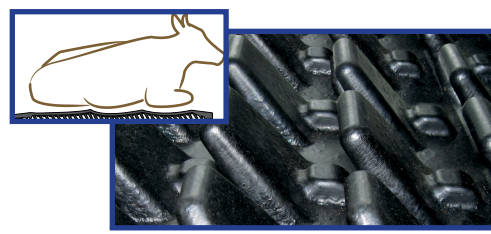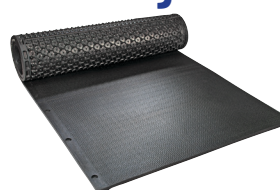Free Stalls ✓ Tie Stalls ✗	<b>KEW Plus LongLine</b> <b>Continuous Layers</b> 		Thickness: 2-1/2" Roll Length: 82' Roll Width: 71"
Free Stalls ✓ Tie Stalls ✗	<b>WELA LongLine</b> <b>Blade Profile</b> 		Thickness: 2" Roll Length: 64' Roll Width: 64" or 72"
Free Stalls ✓ Tie Stalls ✓	<b>KKM LongLine</b> <b>Honeycomb Profile</b> 		Thickness: 1-1/4" Roll Length: 65' 6" Roll Width: 67" or 72"
Free Stalls ✓ Tie Stalls ✓	<b>KIM LongLine</b> <b>Air Cushion Profile</b> 		Thickness: 1-1/4" Roll Length: 86' 1" Roll Width: 63" or 71"

**Brisket Boards** - Can be used with most KRAIBURG stall mats

	<b>ergoBOARD</b> 47-1/4" Long		<b>maxiBOARD</b> 68-3/4" Long	
---	----------------------------------	---	----------------------------------	---

**Calving Pens/Box Stalls**
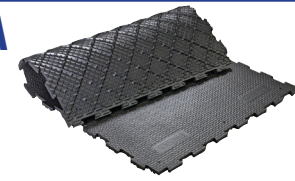
<b>SIESTA</b> <b>Air Cushion Profile</b> 		Thickness: 1-1/4" Mat Width: 45-1/4" Mat Length: 67"
--	---	--

Additional mat sizes are available by special order. Contact Agromatic Inc. for pricing and lead times.

Tolerances for KRAIBURG Mats:  
 thickness: +3/-2 mm (+0.12/-0.08") length + width: +/- 1.5 % (DIN ISO 3302-1 tolerance class M4)  
 The tolerances also apply within the mat and when installed.